



常州市卫星机房设备有限公司
CHANGZHOU CITY B-STAR COMPUTER ROOM EQUIPMENT CO.,LTD.

地址：江苏省常州市横林镇卫星工业区 邮编(PC)：213103

Add: Weixing Industry District, Henglin Town, Changzhou, Jiangsu, P.R. China

电话(TEL): 0519-8501481 传真(FAX): 0519-8505112

[Http://www.starfloor.com.cn](http://www.starfloor.com.cn)

[Http://www.starfloor.com](http://www.starfloor.com)

E-mail: manager@starfloor.com



B S T A R

常州市卫星机房设备有限公司
CHANGZHOU CITY B-STAR COMPUTER ROOM EQUIPMENT CO.,LTD.

[Http://www.starfloor.com.cn](http://www.starfloor.com.cn)

B 公司简介

Brief Introduction

常州市卫星机房设备有限公司创建于2001年，坐落在江苏省常州市横林镇卫星工业区，南临312国道，北靠沪宁高速公路，交通十分便利。

公司专业生产防静电全钢活动地板(600x600x30/35,610x610x35)，OA智能网络活动地板(500x500x28,600x600x30,600x600x35)，防静电全钢通风活动地板，防静电复合活动地板等系列产品，年产能力50万平方米，同时拥有捷慧™、晨露™两个品牌，并在2002年6月顺利通过ISO9001:2000国际质量管理体系认证，持续保持至今。

公司以优良的生产设备，先进的技术手段，确保生产高品质的地板，产品远销世界各地，赢得了用户的信赖、好评！

我们将以优质的产品，优良的服务与世界各地的朋友共创美好未来。



企业商标: 捷慧

企业精神: 团结、拼搏、创新、进取

企业宗旨: 以诚取信，以质求胜，以创新求发展


CHANGZHOU CITY B-STAR COMPUTER ROOM EQUIPMENT CO.,LTD. was established in 2001, certified with ISO9001:2000, which is located in eastern part of Changzhou city of China, along the 312 state Highway and north to Huning Expressway. Our company is very convenient in transportation.

Our company specialized in manufacturing antistatic steel raised access floors (600x600x30, 600x600x35, 610x610x35), O.A steel raised access floors (500x500x28, 600x600x35), antistatic perforated floors and woodcore raised access floors with annual production capacity of 50,000 square meters.

Our company provides excellent production equipments and advanced technical methods to ensure products with high quality. Our products enjoyed high reputation and are well received by the customers all over world.

We will create bright future with friends of various circles with high quality products and best services.






防静电全钢活动地板安装
Installation for Steel Raised Access Floor

采用优质冷轧钢板，经拉伸，点焊成形，外表磷化后进行喷塑处理，内腔填充发泡填料。上表面粘帖高耐磨防火板(HPL)、PVC或瓷砖。四周可以镶嵌导电边条。支架、横梁整体镀锌，支架高度可调并能自锁。

The panel is made of good quality cold-rolled steel sheets, which are punched, spot-welded, coated with epoxy powder after has been phosphorated. Inside of the panel is filled with foamed cement. The top steel sheet of the panel is stuck with high anti-wear and fireproof high-pressure laminate (HPL) or conductive PVC tile or ceramic tile. The borders of the panel are trimmed with conductive PVC edges.

B-STAR

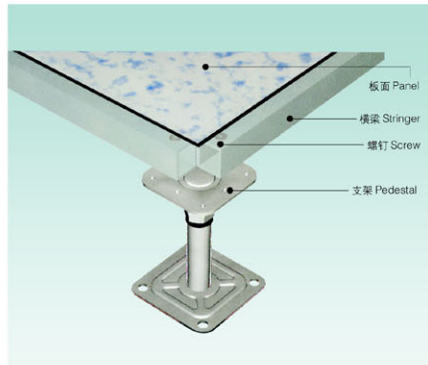

正面 Surface
(有边条型 Four PVC edges)



正面 Surface
(无边条型 No PVC edge)




反面 Bottom

系统组装

系统由板面、横梁、支架组成。横梁和自身高度可调的支架用螺钉连结成稳固的下部支撑系统。地板镶入横梁围成的方格内。

System assembly

The system is composed of panel, stringer and pedestal. The stringer and pedestal that is vertically adjustable are connected together with screws, which constitute stable bottom bearing system. The panel was inlaid in the square lattices enclosed by stringers.

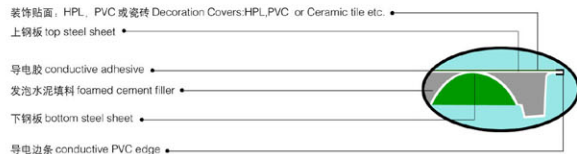

技术参数 SPECIFICATIONS

型号 TYPE		名称 NAME	规格 SIZE(mm)	集中载荷 CONC. LOAD			均布载荷 UNIFORM LOAD < 12500N/m ²	系统电阻 SYSTEM RESISTOR (Ω)
INTERNATIONAL	国标 (GB)			LB	N	KG		
FS668	HDG668	防静电全钢活动地板 ANTISTATIC STEEL RAISED ACCESS FLOOR	600x600x30	> 668	> 3120	> 318	< 2	1X10 ¹⁰ ~ 1x10 ¹¹
			600x600x35	> 800	> 3502	> 357	< 2	1X10 ¹⁰ ~ 1x10 ¹¹
FS1000	HDG1000	防静电全钢活动地板 ANTISTATIC STEEL RAISED ACCESS FLOOR	600x600x30	> 1000	> 4450	> 454	< 2	1X10 ¹⁰ ~ 1x10 ¹¹
			600x600x35	> 1250	> 5563	> 568	< 2	1X10 ¹⁰ ~ 1x10 ¹¹

部分配件



特点

- 表面涂层, 耐腐蚀。
- 尺寸精度高, 互换性好。
- 全钢结构, 强度高。
- 防尘、防静电、防火、防水。
- 地板可以任意切割, 适应不同形状的墙角。
- 地板容易拆装、移位。

适用场合


· 电化教室、电脑房、机房、配电室等需要架空及防静电的场所。

Features

- Surface is treated with static electricity painting, good anti-corrosion.
- High precision of dimensions, good interchangeability.
- All-steel structure with high strength, strong anti-impact ability. Anti-static, fire-proof, water-proof and dust-proof.
- Panel can be cut willfully and easy for installation of its accessories.


Applicable Fields


· Electrical-controlled classroom, Computer room, Programmed control equipment room, Power station control room and fields with aerial and antistatic requirements.

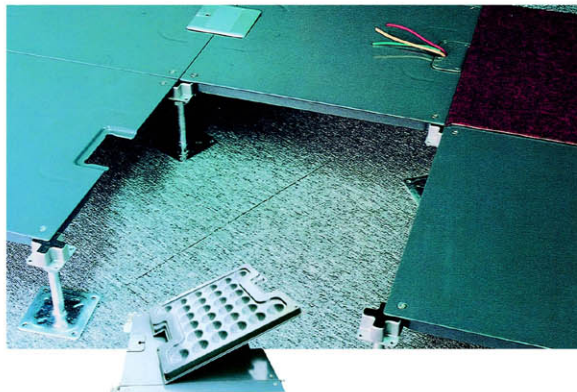

制作工艺与防静电全钢活动地板相似。采用优质冷轧钢板, 经拉伸, 点焊成形。外表经磷化后喷塑处理。内腔填充发泡填料, 分切边与铆接两种, 配有模具成型的出线口, 避免裁锯。通常与方块地毯配套使用。对于长期重载或通行量多的地方, 应在地板相应的部位加辅助支撑, 避免地板变形。


The manufacturing method and technology are similar to antistatic steel raised access panel with slicing or riveting to complete. It is made of quality steel sheets. Wiring chip port is molded forming to make it easier for assembling wires and outlet boxes. The surface of bare panel is often covered with antistatic carpet.

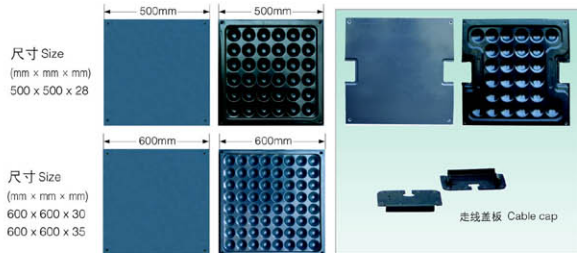

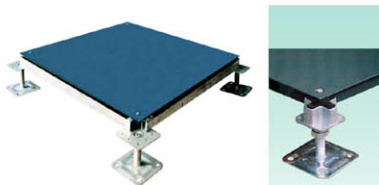

加强型 OA 网络地板
Heavy Duty OA Raised Access Floor

地板铺设 Installation

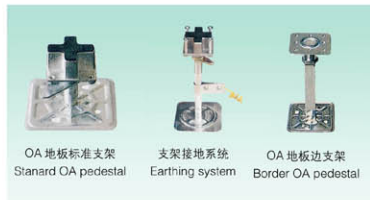

OA 地板标准支架
Standar OA pedestal

支架接地系统
Earthing system

OA 地板边支架
Border OA pedestal

特点

- 表面涂层, 耐腐蚀。
- 尺寸精度高, 互换性好。
- 四角固定, 防止地板滑移, 步感好。
- 出线口模具成型, 配线容易, 方便安装地插座。

适用场合

- 写字楼及智能楼宇, 电化教室, 家庭电器集中的房间。

Features

- Surface is treated with static electricity painting, good anti-corrosion.
- High precision of dimensions, good interchangeability.
- Four corners are fixed to prevent floor from sliding, good feeling for walking.
- Wiring chip port is molded forming to make it easier for assembling wires and outlet boxes.

Applicable fields


- Intelligent office environment, home building, OA classroom, meeting room, places that have requirements of dust-proof and water-proof

技术参数 SPECIFICATIONS


型号 TYPE	名称 NAME	规格 SIZE (mm×mm)	集中载荷 CONC LOAD			均布载荷 UNIFORM LOAD < 12500Nm ² 挠度 DEFLECTION (mm)	备注 REMARK
			LB	N	KG		
FS800	HDG800-501	500x500x28	> 800	> 3502	> 357	< 2	表面防静电方块地毯 SURFACE OF BARE PANEL COVERED WITH ANTISTATIC CARPET
FS1000	HDG1000-501		> 1000	> 4450	> 454	< 2	
FS800	HDG800-502	> 800	> 3502	> 357	< 2		
FS1000	HDG1000-502	> 1000	> 4450	> 454	< 2		
FS800	HDG800	600x600x35	> 800	> 3502	> 357	< 2	
FS1000	HDG1000		> 1000	> 4450	> 454	< 2	

板面铺设地毯的示意图 Carpets on bare panels

线槽尺寸 (Cable Tray Size):
 ○ 150mm × 150mm 150mm × 500mm
 ○ 150mm × 150mm 150mm × 600mm

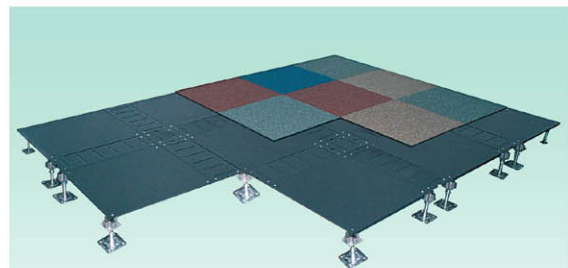

线槽地板由 OA 智能网络活动地板与走线槽组成, 电缆线可以通过线槽到达任何位置, 布线更具灵活性, 同时可以根据国家规范要求将强、弱电分开隔离, 并用颜色或标记将其布线槽区分开, 方便今后检修维护, 另外只要打开线槽盖板就可以检修, 维修, 省时, 省力, 省费用。

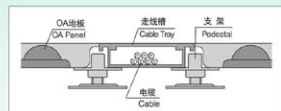

The Cable management system is composed of OA accesspanel,pedestal and cable tray. The layout of the cables and wires would be more flexible with this design.When it need to increase cables or wires,you only move cover board of tray and lay line.It is easy for the second layout and future maintenance.





尺寸 Size(mm × mm × mm)
600 × 600 × 30
600 × 600 × 35

B-STAR

防静电全钢通风活动地板，内腔中空，无填料，钢板与表面装饰层都冲制通风孔，可以配置风量调节器。用于洁净车间通风用，通风率 0~45%。

特点


- 表面涂层，耐腐蚀。
- 尺寸精度高，互换性好。
- 全钢结构，强度高。
- 防尘、防静电、防火、防水。
- 下面通风。
- 地板容易拆装，易位。

The perforated panel is empty and no filler, the steel plate and decoration cover are punched to form air ventilation holes. The rate of air ventilation is 0~45%.


Features

- Treated with static electricity painting, good anti-corrosion.
- High precision of dimensions, good interchangeability.
- Steel structure with high strength, strong anti-impact ability.
- Fire-proof, water-proof and dust-proof.


B-STAR




可安装风量调节片
Ventilation Damper




表面装饰层: HPL 或 PVC
Decoration Cover: HPL or PVC




通风率 32%
Air Rate of Ventilation: 32%



表面装饰层: HPL 或 PVC
Decoration Cover: HPL or PVC



通风率 45%
Air Rate of Ventilation: 45%




表面装饰层: HPL 或 PVC
Decoration Cover: HPL or PVC



通风率 22%
Air Rate of Ventilation: 22%

尺寸 Size (mm × mm × mm)


600 × 600 × 38
600 × 600 × 40

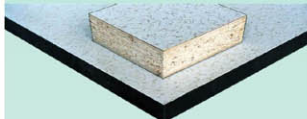

PVC 封边
PVC Strip around Edges of Panel

尺寸 Size (mm × mm × mm)

600 × 600 × 30

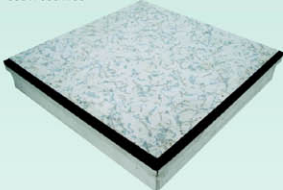

铝合金封边
Aluminum around Edges of Panel

板面采用优质刨花板为基材，厚度可根据要求选定，底面采用镀锌薄板或铝合金薄板，四周采用黑色 PVC 封边或者采用铝合金包边。内嵌导电橡胶条，表面贴HPL或PVC，承重能力可以达到全钢活动地板的标准，并且具有很好的防火、防水、环保性能。

The panel is made of good chip board and thickness differs with requirements. The top is covered with antistatic HPL or PVC and the bottom is covered with aluminium foil or galvanized steel sheet. Four edges are trimmed with PVC or aluminium. It is good at loading, fire proof and water proof.



· HPL 三聚氰胺高耐磨贴面材料


防静电活动地板最常用的贴面材料，由专用纸张经酚醛、三聚氰胺、树脂等处理，高温高压合成。表面光亮耐磨，厚度有0.8mm, 1.0mm, 1.2mm, 1.5mm也可根据要求定制。

HPL is general decoration cover on raised access floor. Thickness 0.8mm, 1.0mm, 1.2mm, 1.5mm and also can be designed as requirements.

· 永久性 PVC 防静电贴面材料 PVC TILES

适用于防静电活动地板，永久防静电，外观美观，通常用于洁净净化厂房等防静电洁净要求高的场所。

Matched with raised access floor, permanent antistatic, good decoration effect and widely used in clean room, micro-electron, places that have requirements of dust proof and antistatic.

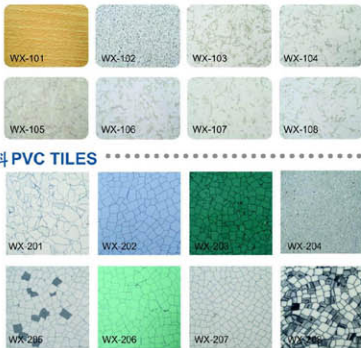


· 陶瓷贴面材料 CERAMIC TILE

陶瓷砖块由天然矿石高温烧制而成，环保，无辐射，高耐磨，质地坚固，使用寿命长，纹理美观而且色差极小，表面光滑，易清洁，贴于架空活动地板表面，通常适用于商场，宾馆，医院，办公大厅等场所。Ceramic tile put on top of raised access floor, good for environmental protection, good anti-corrosion, easy for cleaning and often used in marketplace, hospital, office building.



· 防静电方块地毯 SQUARE CARPET

与OA智能网络活动地板或线槽地板配套使用，用于智能楼宇，办公室等。Square carpet is paved on bare panel of OA intelligent raised access floor system, usually used in office building, meeting room etc.

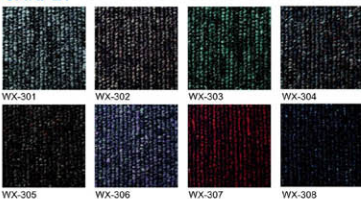

技术参数 SPECIFICATIONS


型号 INTERNATIONAL	TYPE 国标 (GB)	名称 NAME	规格 SIZE (mm)	集中载荷 CONC. LOAD			均布载荷 UNIFORM LOAD ≤ 12500N/m ² 挠度 DEFLECTION (mm)	系统电阻 SYSTEM RESISTOR (Ω)
				LB	N	KG		
FS600	HDM600	防静电复合木质活动地板 COMPOSITE WOODCORE RAISED ACCESS FLOOR	600x600x30	> 600	> 2646	> 270	< 2	10 ⁶ -10 ⁹
FS668	HDM668		600x600x38	> 668	> 3120	> 318	< 2	
FS800	HDM800		600x600x40	> 800	> 3502	> 357	< 2	

■ 插座 Stockets

翻盖式 DT2C-23




开盖式 DK6-B-86/4



DK6A-33




DK6C-77



DK5A



DK5A



■ 走线口 Outlet

方形走线盒
Square Outlet Box



圆形走线盒
Round Outlet Box



■ 吸板器 Panel Lifter



使用维护说明

- 场地温度要求：10℃ - 30℃
- 场地湿度要求：RH30 - 70%
- 严禁重物硬物在地板表面刮划、拖拉。
- 避免阳光直射，以免贴面层过早变色老化。
- 严禁用水冲洗，应用拧干的拖把拖扫。
- PVC 贴面应每隔 6 个月用地板蜡进行打蜡处理，以保持地板的光泽。
- 请使用专用的吸板器开启或安装地板。
- 对于长期重载或通行量多的地方，应在地板相应的部位加辅助支撑，避免地板变形。



Notices and Maintenance

- Environmental requirements for applicable fields:
Temperature: 10℃ - 30℃
Relative humidity: RH30-70%
- It is forbidden to use hard or sharp things to extrude and scratch the panel
- Avoid sun light shining it directly to prevent cover layer from changing color and aging earlier
- Water wash is prohibited for cleaning floor, dry mop shall be used to clean it.
- PVC tile shall be coated with wax one time within six months, if the personnel who walk are busy, please coated more times.
- Please use special panel lifter for opening or installing raised access floor.
- In busy and heavy load area, auxiliary pedestal shall be added at the relative part of floor.


安装步骤 [注：OA 智能网络活动地板安装时不需第 5 项步骤。]




1. 清洁地面
3. 放置支架
5. 横梁联接
7. 封边



2. 画网格线
4. 调整水平
6. 安装地板
8. 清洁地板表面



1. Clean ground
3. Emlpace pedestal
5. Connect stringer
7. Finish border



2. Draw square
4. Adjust level
6. Setup panel
8. Clean panel

